

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
27 December 2001 (27.12.2001)

PCT

(10) International Publication Number  
**WO 01/99127 A2**

(51) International Patent Classification<sup>7</sup>: **H01F 1/00**

(US). MINTEER, Shelley, D. [US/US]; 2150 Gregory, Pacific, MO 63069 (US). GELLETT, Wayne, L. [US/US]; 86 Westside Drive, Iowa City, IA 52246 (US).

(21) International Application Number: PCT/US01/19368

(74) Agents: FLESHNER, Mark, L. et al.; Fleshner & Kim, LLP, P.O. Box 221200, Chantilly, VA 20153-1200 (US).

(22) International Filing Date: 19 June 2001 (19.06.2001)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(25) Filing Language: English

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(26) Publication Language: English

[Continued on next page]






(30) Priority Data:  
60/212,630 19 June 2000 (19.06.2000) US

(71) Applicant (*for all designated States except US*): THE UNIVERSITY OF IOWA RESEARCH FOUNDATION [US/US]; 214 Technology Innovation Center, Oakdale Research Campus, Iowa City, IA 52242 (US).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): LEDDY, Johna [US/US]; 905 South Summit Street, Iowa City, IA 52240

(54) Title: NEW MAGNETIC MATERIALS, METALLIC PARTICLES AND METHOD OF MAKING SAME

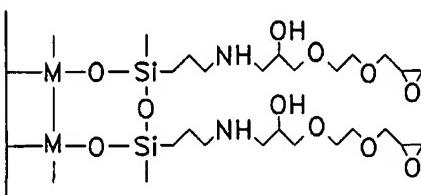

(57) Abstract: New magnetic materials and new metallic particles, new methods of making and using same, for example, to prepare magnetically modified electrodes and fuel cells, and coated metallic particles in general. The present invention discloses methods of preparation of cheaper and more uniformly sized magnetic and metallic microparticles formed from the exemplary materials magnetite, nickel, samarium cobalt and neodymium iron boron. In addition, the present invention discloses methodology for preparation and use of coated magnetic and metallic microparticles, in particular, exemplary siloxyl coating of magnetic particles, metallic particles, and magnetic and metallic microparticles with an exemplary silane, 3-aminopropyltrimethoxysilane, that is cross linked thereon. In addition, methods and results are described for preparing and using larger siloxyl coated samarium

**WO 01/99127 A2**

cobalt milliparticles. Coated magnetic milliparticles and magnetic microparticles are useful as component of composites that are applied to electrodes to alter electrochemical fluxes across those electrodes, as well as to alter chemical reactions on surfaces of those electrodes, when magnetically susceptible reactions occur there.

---

**WO 01/99127 A2****Published:**

- without international search report and to be republished upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

WO 01/99127

PCT/US01/19368

**NEW MAGNETIC MATERIALS, METALLIC PARTICLES  
AND METHODS OF MAKING SAME**

**BACKGROUND OF THE INVENTION**

**1. Field of the Invention**

The present invention relates generally to new magnetic materials and new metallic particles, and methods for their manufacture. In particular, the present invention relates to new magnetic materials and new metallic particles, methods of making them (including methods of siloxyl coating them), and methods of using them, for example, to prepare magnetically modified electrodes for fuel cells, electrolytic cells, and batteries that thereby benefit from resulting enhanced or otherwise beneficially altered function.

**2. Background of the Related Art**

Commercially available paramagnetic microparticles are expensive and not of uniform size. For example, the paramagnetic microparticles are reported to be 1-2  $\mu\text{m}$  in diameter, but microscopy indicates they are 0.1-10  $\mu\text{m}$  in diameter. In addition, each batch has a different magnetic content. These variations in size and magnetic field strength introduce additional experimental variables that diminish reproducibility and greatly reduce experimental precision. Paramagnetic microparticles can cost approximately \$400 per gram. Although this figure may not be great when modifying small  $0.45 \text{ cm}^2$  electrodes with 3-6  $\mu\text{m}$  thick composites, it becomes significant when the magnetic microparticles are used in larger industrial and commercial applications.

Therefore, a need exists for new magnetic micromaterials and new metallic materials generally, such as magnetic microparticles and metallic microparticles, that are fabricated with more uniformity. In addition, a need exists for new magnetic micromaterials, such as magnetic microparticles, that have higher magnetic field strengths in order to more greatly facilitate magnetically susceptible chemical reactions and other magnetically susceptible processes. In this regard, a need exists for magnetic microparticles with thinner coatings to permit advantageous use of their magnetic fields, which taper off with distance by a function of the inverse cube of the distance  $x$  from the particle:  $x^{-3}$ . Furthermore, a need

WO 01/99127

PCT/US01/19368

exists for a method of coating metallic particles in general, for example, to prevent oxidative and other detrimental surface processes and reactions.

The following United States and PCT patent documents to Leddy, et al., are hereby incorporated by reference in their respective entireties: United States Patent Nos. 5,786,040, 5,817,221, 5,871,625, 5,928,804, 5,981,095, and 6,001,248; United States Patent Application Nos. 08/429,931, 09/047,494, 09/122,861, 09/362,495, 09/429,931, and 09/458,058; PCT Application Nos. PCT/US00/15041 and PCT/US00/28242; and Provisional Patent Application Nos. 60/212,630, 60/208,322, 60/159,374, and 60/139,318.

The above references are incorporated by reference herein where appropriate for appropriate teachings of additional or alternative details, features and/or technical background.

### SUMMARY OF THE INVENTION

An object of the present invention is to provide solutions to the above described disadvantages of prior art metallic particles and magnetic particles, and to provide at least the advantages described hereinafter.

In particular, it is an object of the present invention to provide micromaterials and magnetic microparticles as well as a methodology for producing micromaterials, including magnetic microparticles, that have a high degree of uniformity.

It is another object of the present invention to provide micromaterials and magnetic microparticles as well as a methodology for producing micromaterials, including magnetic microparticles, that have a low variability as to particle size.

It is another object of the present invention to provide micromaterials and magnetic microparticles as well as a methodology for producing micromaterials, including magnetic microparticles, that have a low variability as to magnetic field strength.

It is another object of the present invention to provide micromaterials and magnetic microparticles as well as a methodology for producing micromaterials, including magnetic microparticles, that have a relatively uniformly high magnetic field strength.

WO 01/99127

PCT/US01/19368

It is another object of the present invention to provide micromaterials and magnetic microparticles as well as a methodology for producing micromaterials, including magnetic microparticles, that simultaneously have low variability as to particle size, low variability as to magnetic field strength, and relatively uniformly high magnetic field strength.

5 It is another object of the present invention to provide micromaterials and magnetic microparticles as well as a methodology for producing metallic micromaterials, including metallic microparticles, that have a high degree of uniformity.

10 It is another object of the present invention to provide micromaterials and magnetic microparticles as well as a methodology for producing metallic micromaterials, including metallic microparticles, that have a low variability as to particle size.

15 It is another object of the present invention to provide micromaterials and metallic microparticles with at least one chemically inert coating as well as a methodology for producing at least one coating on micromaterials, including on magnetic microparticles and on metallic microparticles generally, to prevent or at least retard surface oxidative processes and surface reactions and surface processes in general, including dissolution, decomposition and any chemical reaction thereat.

20 It is another object of the present invention to provide micromaterials and metallic microparticles with at least one chemically inert coating as well as a methodology for producing at least one chemically inert coating on micromaterials, including on magnetic microparticles and on metallic microparticles generally, to prevent or at least retard surface oxidative processes and surface reactions and surface processes in general, including dissolution, decomposition and any chemical reaction thereat.

25 It is another object of the present invention to provide micromaterials and metallic microparticles with at least one chemically inert coating of a siloxyl as well as a methodology for producing at least one chemically inert coating of a siloxyl on micromaterials, including on magnetic microparticles and on metallic microparticles, to prevent or at least retard surface oxidative processes and surface reactions and surface processes in general, including dissolution, decomposition and any chemical reaction thereat.

WO 01/99127

PCT/US01/19368

It is another object of the present invention to provide a methodology for producing at least one chemically inert coating of cross linked 3-aminopropyltrimethoxysilane (or other X-C<sub>x</sub>-trialkoxysilane, as defined herein) on micromaterials, including on magnetic microparticles and on metallic microparticles generally, to prevent or at least retard surface oxidative processes and surface reactions and surface processes in general, including dissolution, decomposition and any chemical reaction thereat.

5 It is another object of the present invention to provide metallic microparticles and magnetic microparticles with at least one chemically inert coating that prevents or at least retards surface oxidative processes and surface reactions and surface processes in general, including dissolution, decomposition and any chemical reaction thereat.

10 It is another object of the present invention to provide metallic microparticles and magnetic microparticles with a siloxyl coating that prevents or at least retards surface oxidative processes and surface reactions and surface processes in general, including dissolution, decomposition and any chemical reaction thereat.

15 It is another object of the present invention to provide metallic microparticles and magnetic microparticles with at least one chemically inert coating of cross linked 3-aminopropyltrimethoxysilane (or other X-C<sub>x</sub>-trialkoxysilane, as defined herein) on micromaterials, including on magnetic microparticles and on metallic microparticles generally, to prevent or at least retard surface oxidative processes and surface reactions and surface processes in general, including dissolution, decomposition and any chemical reaction thereat.

20 It is another object of the present invention to provide metallic microparticles and magnetic microparticles with at least one covalently bound siloxyl coating that prevents or at least retards surface oxidative processes and surface reactions and surface processes in general, including dissolution, decomposition and any chemical reaction thereat.

25 It is another object of the present invention to provide metallic microparticles and magnetic microparticles with at least one covalently bound siloxyl coating that is cross linked that prevents or at least retards surface oxidative processes and surface reactions and surface processes in general, including dissolution, decomposition and any chemical reaction thereat.

WO 01/99127

PCT/US01/19368

It is another object of the present invention to provide metallic microparticles and magnetic microparticles with a plurality of siloxyl coatings that prevent or at least retard surface oxidative processes and surface reactions and surface processes in general, including dissolution, decomposition and any chemical reaction thereat.

5 It is another object of the present invention to provide metallic microparticles and magnetic microparticles with a plurality of siloxyl coatings that are cross linked that prevent or at least retard surface oxidative processes and surface reactions and surface processes in general, including dissolution, decomposition and any chemical reaction thereat.

10 It is another object of the present invention to provide metallic microparticles and magnetic microparticles with a plurality of chemically inert coatings of cross linked 3-aminopropyltrimethoxysilane (or other X-C<sub>x</sub>-trialkoxysilane, as defined herein) on micromaterials, including on magnetic microparticles and on metallic microparticles generally, to prevent or at least retard surface oxidative processes and surface reactions and surface processes in general, including dissolution, decomposition and any chemical reaction thereat.

15 It is another object of the present invention to provide magnetic electrodes with enhanced or altered function (depending on the particular process) comprising siloxyl coated magnetic microparticles.

20 It is another object of the present invention to provide a methodology for producing magnetically modified electrodes with enhanced or altered function (depending on the particular process) comprising siloxyl coated magnetic microparticles.

It is another object of the present invention to provide a methodology for enhancing or altering fuel cell electrolysis (depending on the particular process) with siloxyl coated magnetic particles.

25 It is another object of the present invention to provide a methodology for enhancing or altering electrolytic cell electrolysis (depending on the particular process) with siloxyl coated magnetic particles.

It is another object of the present invention to provide a methodology for enhancing or altering electrolysis (depending on the particular process) at an electrode surface with siloxyl coated magnetic particles.

WO 01/99127

PCT/US01/19368

It is another object of the present invention to provide a magnetically modified fuel cell with enhanced or altered function (depending on the particular process) due to at least one electrode with siloxyl coated magnetic particles.

5 It is another object of the present invention to provide a magnetically modified fuel cell with enhanced or altered oxidation rates of organic fuels (depending on the particular process) due to at least one electrode with siloxyl coated magnetic particles.

It is another object of the present invention to provide a magnetically modified fuel cell with enhanced oxidation rates of organic fuels as a result of increased tolerance at an anode due to at least one coating thereon containing siloxyl coated magnetic particles.

10 It is another object of the present invention to provide a magnetically modified fuel cell with enhanced oxidation rates of organic fuels as a result of enhanced oxygen kinetics at a cathode due to at least one coating thereon containing siloxyl coated magnetic particles.

15 It is another object of the present invention to provide a magnetically modified electrolytic cell with enhanced or altered function (depending on the particular process) due to at least one electrode with siloxyl coated magnetic particles.

It is another object of the present invention to provide a magnetically modified semiconductor electrode with enhanced or altered function (depending on the particular process) due to at least one electrode with siloxyl coated magnetic particles.

20 It is another object of the present invention to provide a battery with enhanced or altered function (depending on the particular process) due to at least one electrode with siloxyl coated magnetic particles.

25 It is another object of the present invention to provide a surface coating for particles, wherein the surface coating may simultaneously or subsequently modified by including functional chemical groups, for example, including catalysts, enzymes, enzyme active sites, enzyme regulatory sites, enzyme inhibitory sites, ion exchange molecules, binders, ligand binding sites, hydrophilic molecules, hydrophobic molecules, and combinations thereof.

Additional advantages, objects, and features of the invention will be set forth in part in the description which follows, and in part will become apparent to those having ordinary skill in the art upon examination of the following, or may be learned from practice of the invention.

WO 01/99127

PCT/US01/19368

The objects and advantages of the invention may be realized and attained as particularly pointed out in the appended claims.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be described in detail with reference to the following drawings in which like reference numerals refer to like elements, wherein:

Figure 1 outlines steps used to prepare magnetic microparticles (samarium cobalt, magnetite, nickel, and iron oxides in general, as well as metallic and non-metallic microparticles in general);

Figure 2 summarizes the basic chemistry of the siloxyl coating procedure;

Figure 3 outlines steps of the siloxyl coating procedure;

Figure 4 outlines steps for preparation of siloxyl coated large samarium cobalt milliparticles;

Figure 5 outlines steps for preparing a magnetic electrode with siloxyl coated magnetic particles;

Figure 6 shows 100 mV/s cyclic voltammograms of tris(2,2'-bipyridyl) ruthenium (II) in a siloxyl coated samarium cobalt microparticle/Nafion® composite and a Nafion® film;

Figure 7 shows 100 mV/s cyclic voltammograms of tris(2,2'-bipyridyl) ruthenium (II) in a samarium cobalt milliparticle/Nafion® composite and a Nafion® film;

Figure 8 shows 100 mV/s cyclic voltammograms of tris(2,2'-bipyridyl) ruthenium (II) in a siloxyl coated magnetite microparticle/Nafion® composite and a Nafion® film; and

Figure 9 shows 100 mV/s cyclic voltammograms of tris(2,2'-bipyridyl) ruthenium (II) in a siloxyl coated nickel microparticle/Nafion® composite and a Nafion® film. Nickel electrode data were recorded in an external magnetic field.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The new magnetic micromaterials of the present invention were prepared by use of a milling process, followed by a siloxyl coating procedure, as described hereinafter. These processes and procedures have applicability to metallic particles generally. Herein, "metallic"

WO 01/99127

PCT/US01/19368

is defined to include any element, compound, or mixture that comprises an element that can be a metal, a semi-metal, or a semiconductor; for example, silver and silver chloride are both metallic according to this definition, as are Si and SiO<sub>2</sub>.

The new metallic and magnetic micromaterials of the present invention have a range of material costs, depending on the specific material. The new metallic and magnetic materials of the present invention include particles made of magnetite and other iron oxides, samarium cobalts of various stoichiometries, nickel, neodymium iron boron, and metallic particles in general.

New magnetic microparticles of the present invention were made by milling metallic or magnetic materials, and then coating the resulting microparticles with silanes to provide a protective siloxyl coating. For reference, Polysciences paramagnetic microparticles are made of iron oxide, and are shrouded in polystyrene. The new magnetic materials of the present invention comprise materials that fall into several categories. Magnetite and iron oxides in general, and samarium cobalt microparticles, for example, are paramagnetic, which means that, once magnetized, they will sustain a magnetic field in the absence of an external magnetic field. Other materials are superparamagnetic, which means that they require an external magnet in order to sustain a magnet field themselves. Superparamagnetic materials also comprise otherwise paramagnetic materials when the particles are sufficiently small (< or ≈ 0.5 μm), so that they are not capable of sustaining a magnetic field in the absence of an external magnet.

Samarium cobalt magnets are very strong rare earth magnets, but are not as strong as neodymium iron boron magnets. The silane chemisorption methodology of the present invention has been used to produce a chemically inert protective coating for neodymium iron boron when at least two coatings are applied onto such particles. On the other hand, the silane chemisorption methodology of the present invention has been found to be effective with application of a single coating on samarium cobalt, magnetite, and nickel microparticles, as herein below described.

Microparticles. In a preferred embodiment, magnetic microparticles and metallic microparticles are made (as is outlined in Fig. 1) by milling magnetic or metallic materials to diameters of about 5 μm (usual diameter range ~ 2 to ~ 10 μm, with outside limits of ~ 0.1

WO 01/99127

PCT/US01/19368

to ~ 20  $\mu\text{m}$ ) using, for example, a Brinkmann Centrifugal Ball Mill Model S1000. A roughly 10 mL volume of dry magnetic or metallic material with initial material sizes having diameters of less than about 2 mm is selected 102, placed in a dry ball mill 104, and ground in a 50 mL zirconia grinding set (zirconia internal surface, plus zirconia grinding balls) for about 2 hours 5 at a turntable speed setting of about 85 106. This produces particles with a diameter of about 20  $\mu\text{m}$ . Then, to produce smaller microparticles, 2-3 mL of 18 M $\Omega$  water is added to the magnetic or metallic material in the zirconia jar, and the magnetic or metallic material is ground for an additional roughly 2 hours at a turntable speed setting of about 85 (which is a setting for 10 the Model S1000) 108. The magnetic or metallic material is then allowed to dry by vacuum dessication ( $10^{-4}$  torr; however, other values can be used in the procedure) or other drying procedure 110, and subsequently is removed from the zirconia jar. This produces particles with 15 a diameter of about 5  $\mu\text{m}$  (outside range about 0.1 to about 20  $\mu\text{m}$ ). The zirconia jar and grinding balls are washed thoroughly with 18 M $\Omega$  water, and dried before new magnetic or metallic samples are introduced. Materials other than zirconia are contemplated for this methodology, as long as they are harder than the particles being milled.

This procedure is appropriate for smaller laboratory uses. However, larger industrial uses will benefit from scaled-up procedures, in which, for example, larger dry ball mills are used, and the starting dry magnetic or metallic particles are larger, for example, 2-3 cm in diameter. Milling times are generally longer than the above when the starting materials have 20 larger diameters. In addition, this procedure (either the laboratory scale or the industrial scale procedure) can be used advantageously for preparation of metallic microparticles in general, not just for magnetic microparticles.

This methodology was applied to the magnetic materials samarium cobalt ( $\text{Sm}_2\text{Co}_7$ ; Aldrich) and magnetite (Aldrich). Unmagnetized nickel powder of roughly 2-3  $\mu\text{m}$  diameter 25 (Novamet) was used without milling. Information on these magnetic materials is provided in Table 1. The nickel powder is a porous filamentary powder, so actual particle density is much less than the density of nickel metal given in Table 1. The magnetite ( $\text{Fe}_3\text{O}_4$ ) and samarium cobalt ( $\text{Sm}_2\text{Co}_7$ ) materials, purchased without external magnetization, are inherently

WO 01/99127

PCT/US01/19368

magnetizable materials. Other iron oxides and samarium cobalt materials will benefit also from the siloxyl coating procedure of the present invention.

Table 1. Magnetic Material Properties

Magnetic Microparticle	Density(g/cm <sup>3</sup> )	Magnetic Energy Product (MGo)
Samarium Cobalt (Sm <sub>2</sub> Co <sub>7</sub> )	8.3	12-18
Magnetite (Fe <sub>3</sub> O <sub>4</sub> )	5.18	1-5
Nickel (Ni)	8.9	<1

Chemical Coating. Because these magnetic materials corrode (as do metallic particles in general), it was necessary to shroud the magnetic and metallic microparticles in at least one chemically inert protective coating [A. Hellet 1997, personal communication; K. Emoto, J.M. Harris & J.M.V. Alstine 1996, *Anal. Chem.* 68: 3751-3757], where "chemically inert" can mean *relatively* chemically inert, for example, to allow chemical attachment of selected chemical moieties of any desired sort. In a preferred embodiment, this procedure (see Fig. 2 for the general chemical concept of the procedure; see Fig. 3 for steps of the procedure) is commenced by mixing the magnetic or metallic microparticles (about 1 gram of microparticles in about 25 mL of solution; relative amounts may be varied according to a particular use) in a roughly 50/50 (v/v) solution of 3-aminopropyltrimethoxysilane (Aldrich)/toluene (generally, an X-C<sub>x</sub>-trialkoxysilane in an aromatic organic solvent, including in multicyclic aromatics and heterocyclic aromatics, or in a saturated or unsaturated alkane of C<sub>5</sub> or longer) 302, and vigorous shaking or shaking by hand [with frequent inversions (roughly one inversion per second) to maintain the magnetic microparticles in suspension when a vigorous shaking protocol is not used] for about 4 hours when the procedure is conducted at room temperature (roughly 17°C to about 25°C) 304. Higher temperatures suffice for the reaction, as long as the mixture/suspension does not boil, which is a function of the organic solvent's boiling point. Thus, temperature ranges at least as high as 70°C to 140°C are possible for this reaction, depending upon the choice of organic solvent with an appropriate boiling point. The relative volumes of silane/organic solvent, and microparticles/solution of silane/organic solvent, are governed by the relative amounts of reactive silane groups to oxide and/or hydroxide groups

WO 01/99127

PCT/US01/19368

on the metallic or magnetic microparticles; in particular, there should be an excess of reactive silane groups over the number of reactive oxide and/or hydroxide groups with which siloxyl covalent bonds are to take place.

Figure 3 displays the general formula for a suitable silane according to the present invention, X-C<sub>x</sub>-trialkoxysilane, where X is a cross linkable group, for example, an amide, an amino, a thiol, a chloro, a bromo, an iodo, a thiol, a carboxy, an aldehyde, an alcohol, an alkoxy, a sulfonyl, a carbonyl, a methacryl, a nitrile, or other similarly reactive group, and where each X group is matched with a cross linking agent that is reactive toward that X group; x can equal from 1 to about 20; C<sub>x</sub> is a linear or branched carbon chain that is saturated or unsaturated, and that also can comprise a cyclic group with the proviso that the cyclic group must be separated from the trialkoxysilane moiety by a carbon chain that is at least 2 carbons in length; and trialkoxysilane comprises alkoxy groups that independently can be methoxy, ethoxy, propoxy, butoxy, pentoxy, hexoxy, heptoxy, or phenoxy (which may optionally be substituted). Room temperature encompasses a temperature range from about 17°C to about 25°C. "Frequent inversions" are roughly an inversion per second, though a range from about an inversion per 2 or 3 seconds to 2-4 inversions per second provide adequate maintenance of a suspension to promote siloxyl coating of the magnetic microparticles, metallic microparticles, or other particles. The magnetic microparticles, metallic microparticles, or other particles are then allowed to settle and the supernate decanted 306, and rinsed several times with toluene or other organic solvent (such as an aromatic organic solvent, including multicyclic aromatics and heterocyclic aromatics, such as xylene, benzene, substituted benzenes, etc.) or with a saturated or unsaturated alkane of C<sub>5</sub> or longer (preferably saturated) 308, and dried by dessication (for example, by vacuum dessication) or other drying procedure 310. The magnetic or other metallic particles can be separated from the organic solvent by methods other than settling and decanting of supernate, for example, filtration, centrifugation, use of a magnet, etc. Once dry, the magnetic microparticles are suspended in a roughly 50/50 (v/v) cross linking solution of about 50% purity cross linking agent ethylene glycol diglycidyl ether (Aldrich)/water 312, and vigorously shaken or shaken by hand [with frequent inversions (about once per second; see above) to maintain the magnetic microparticles in suspension] for

WO 01/99127

PCT/US01/19368

about 4 hours when the procedure is executed at room temperature (range from about 17°C to about 25°C) 314. The phrase "cross linking solution" means a solution comprising at least one cross linking agent, and also includes a pure cross linking agent. Higher temperatures may be employed, for example, at least as high as about 70°C. Other cross linking agents can be  
5 utilized advantageously in this procedure, for example, ethylene glycol dimethacrylate, 2-ethylhexyl glycidyl ether, ethylene glycol bis[pentakis (glycidyl allyl ether)] ether, 1,4-butanediol glycidyl ether, 4-tert-butyl phenyl glycidyl ether, N,N'-bis (acryloyl) cystamine, nitrilotriacetic acid tri (N-succinimidyl) ester, and 4-azidophenyl isothiocyanate, as long as they are reactive toward the X group of the X-C<sub>x</sub>-trialkoxysilane. Each cross linking agent will have a preferred  
10 temperature range and set of reaction conditions. The cross linking reaction is typically run in an aqueous solution. The relative volume of cross linking solution to microparticles may be varied, and are selected so that there is roughly an equality between number of cross linking groups and reactive X groups, or an excess number of cross linking groups over the number of reactive X groups. The resulting coated (and cross linked) magnetic microparticles or  
15 metallic microparticles are then allowed to settle and the supernate decanted (or other separation procedure, as indicated above) 316, and the magnetic microparticles rinsed several times with 18 MΩ water 318, and dried by dessication or other drying procedure 320.

As is summarized in Figure 4, large samarium cobalt *milliparticles* are prepared in the same way as the *microparticles* except that the *milliparticles* are wet/damp at commencement  
20 of the coating process 402. When the magnetic microparticles are wet/damp at time of introduction to the aminopropyltrimethoxysilane/toluene mixture (or, generally, amino-C<sub>x</sub>-alkoxysilane in an organic solvent, as described above), they clump or coagulate to form larger milliparticles during the shaking/suspension process 404. Thus, these larger milliparticles can constitute an agglomeration of small microparticles; alternatively, a samarium cobalt milliparticle also can constitute a single large milliparticle. The other steps (406, 408, 410, 412,  
25 414, 416, 418, and 420, respectively) are identical to respective even numbered steps 306 to 320 of Figure 3.

A resulting single siloxyl coating on the magnetic microparticles or other particles is in the range of about 10 Angstroms to about 30 Angstroms thick.

WO 01/99127

PCT/US01/19368

For many kinds of particles, a single coating suffices. The process may be repeated to form one or more additional coatings, as is necessary with neodymium iron boron particles. With neodymium iron boron microparticles, a single siloxyl coating procedure results in uncoated projections that are readily reactive in an appropriate solution; whereas application 5 of a second siloxyl coating procedure produces neodymium iron boron microparticles that are fully resistant to surface reactions, including in a Nafion® testing suspension (superacid; see below).. However, an improved procedure introduces an additional step that produces a more stable second coat, namely, a heating step that follows the first coating, and before application 10 of the second coating: the single coated neodymium iron boron particles are annealed by heating to a temperature less than the curie temperature (the temperature at which magnetic properties are lost by the particular material). An exemplary additional step is to heat the single coated neodymium iron boron particles to about 450°C ( $\pm$  about 20 to 30°C) in a nitrogen atmosphere for about an hour (could be varied between about half an hour and about 2 hours). This step drives off -OH and H<sub>2</sub>O groups, and produces a glassy like first coating. Upon 15 cooling, the single coated particles can then be subjected to the same procedure that was used to produce the first coating.

Preparation of Composites. Composites are formed by co-casting a 5% by weight (w/w) suspension of Nafion® 1100 in lower aliphatic alcohols (Aldrich) and the siloxyl coated magnetic microparticles. For iron oxide microparticles, the volumes of the coated magnetic 20 microparticles and the Nafion®/lower aliphatic alcohol solution are selected so as to yield a dry composite with about 15% by volume as siloxyl coated magnetic microparticles, and about 85% as Nafion®. When the volume of microparticles in the dry composite is less than about 7.5%, the composites do not produce sufficiently large magnetic field effects. When the volume of microparticles in the dry composite is more than about 20%, the composites are 25 prone to cracking. The preferred range for the volume of iron oxide microparticles in the dry composite is about 9% to about 19%. However, note that the beneficial volume range for the dry composite will vary according to the magnetic field strength of the particles, as well as the size of the particles. For example, when neodymium iron boron magnets (with stronger

WO 01/99127

PCT/US01/19368

magnetic fields) are used, the preferred volume range for the dry composite may vary from about 5% to more than 20%, for example, to about 30%.

To test the stability of resulting microparticles, siloxyl coated magnetic microparticles were placed in a Nafion® suspension (superacid) for a week to see if corrosion would occur.

5 No corrosion was observed either visually or electrochemically.

It is also important to note that ion exchange polymers other than Nafion® may beneficially be used in practice of the present invention, for example, including polystyrene sulfonates, polyvinylpyridines, and Flemion®, etc. In addition, these polymers may be modified by various means to alter physical and chemical properties thereof.

10 Reagents for Cyclic Voltammetry. Cyclic voltammetry was performed on tris (2,2'-bipyridyl) ruthenium (II) chloride hexahydrate ( $\text{Ru}(\text{bpy})_3^{+2}$ ; Aldrich) through the composites. All solutions were made in 18 MΩ (Milli-Q) water. The concentration of the redox species was 1.0 mM with 0.10 M nitric acid electrolyte.

15 Electrode Preparation for Cyclic Voltammetry. The general procedure followed for preparing a glassy carbon electrode is summarized in Figure 5. This procedure was applied to a glassy carbon disk working electrode. However, the procedure may equally well be applied to other electrodes that fall within the contemplated scope of application of siloxyl coated magnetic or other particles according to practice of the instant invention, for example, to electrodes made of metals, semi-metals, and semiconductors, including the alkali metals, the 20 alkaline earths, the transition metals, the lanthanides and actinides, the elements of Groups IIIA, IVA, and VIA, including, for example, gold, platinum, palladium, steel, carbon (for example, pyrolytic graphite, vitreous carbon, carbon black, graphite powder, highly ordered pyrolytic graphite, carbon paste, graphite composites, wax impregnated graphite, etc.), lead, iron, copper, aluminum, antimony, chromium, tin, silicon, nickel, germanium, manganese, magnesium, mercury, molybdenum, neodymium, gallium, boron, ruthenium, tungsten, titanium, zinc, and zirconium, including their oxides, nitrides, alloys, chalcogenides, halides, sulfides, selenides, tellurides, phosphides, alloys, and arsenides, etc., and mixtures thereof. The 25 present procedure may also be applied to conducting organic and other polymers, including polyanilines, polypyrroles, polythiophenes, polyacetylenes, and derivatives thereof, as well as

WO 01/99127

PCT/US01/19368

polymers comprising such components as graphite fibers, carbon nanotubes, etc. The procedure may be applied to electrodes made of any material that conducts electrons, including, for example, sodium electrodes that are operated in a non-aqueous and non-oxygen environment. The procedure may also be applied to semiconductor electrodes, including 5 doped and intrinsic. The procedure may also be applied to boron nitride electrodes.

A glassy carbon disk working electrode was provided 502 (exemplary area = 0.459 cm<sup>2</sup>; however, the general procedure applies to any size of electrode), and was polished 504 successively with 1.0 µm, 0.3 µm, and 0.05 µm alumina on Svelt polishing cloths (Buehler). (Note that different polishing cloths may be used when other electrodes are employed.) The 10 electrode was then cleaned 506 by sonicating for about 5 minutes (range: about 1 to about 20 minutes) in 18 MΩ water to remove remaining alumina, soaking in concentrated nitric acid for about 2 minutes (approximate range: about 1 minute to about 10 minutes), and thoroughly rinsing with 18 MΩ water. With some metallic and other electrodes, dilute nitric acid may be used in place of concentrated nitric acid. The electrode surface was then modified with either 15 a Nafion® film or a magnetic microparticle/Nafion® composite. Nafion® films were prepared by pipetting an appropriate volume of about 5% by weight (w/w) Nafion® solution (the 5% by weight Nafion® polymer is mixed into a solution that is roughly 50% (v/v) 18 MΩ water and roughly 50% lower, straight chain aliphatic alcohols) onto the electrode surface. (Note that Nafion® polymer may also advantageously be mixed with other amounts of 20 aqueous solvent, as well as with other solvents, for example, with an alcohol, in order to change porosity properties of the resulting Nafion® composite.) The magnetic microparticle/Nafion® composites (containing siloxyl coated magnetic microparticles) were prepared by pipetting an appropriate volume of composite stock solution onto the electrode surface in the presence of an external magnet 508, the shape of which affects the kinds of 25 pillared composite structures that result, as is known in the art. The resulting Nafion® coated or Nafion®-magnetic composite coated electrode was then dried 510 by vacuum dessication or other drying method. Samarium cobalt composites were handled similarly, except that the electrodes with composite and samarium cobalt were placed in an external magnet of a desired shape (again, shape of magnet being selected based on the desired shape of composite pillars)

WO 01/99127

PCT/US01/19368

after the films were dry. The composite stock solution was prepared by adding appropriate fractions of 5% by weight (w/v) Nafion® solution and dry magnetic microparticles (siloxyl coated) together. The fractions are calculated so that the dry composite film is composed of about 15% by volume as siloxyl coated magnetic microparticles (range about 9% to about 19%; 5 see above for notes on other details and other ranges that apply to other magnetic or metallic materials) and about 85% by volume as Nafion®. The film thicknesses were about 5.1  $\mu\text{m}$ .

One exceptional study was performed on an electrode modified with one large samarium cobalt particle. These films were prepared by centering a roughly 1 mm diameter siloxyl coated samarium cobalt particle on the electrode surface, and pipetting the above 10 described 5% by weight (w/w) Nafion® solution over the particle/electrode. Thus, the samarium cobalt particle was suspended on the electrode surface with a Nafion® solution. The samarium cobalt particle was not buried inside the film because the particle was much thicker than the film.

Electrochemical Measurements. The electrochemical flux of  $\text{Ru}(\text{bpy})_3^{+2}$  through the 15 membrane layer to the electrode surface was studied using cyclic voltammetry. Nafion® film and magnetic microparticle/Nafion® composite modified working electrodes were equilibrated in 1.0 mM  $\text{Ru}(\text{bpy})_3^{+2}$  and 0.1 M nitric acid for 4 hours before measurements were taken. The reference electrode was a saturated calomel electrode. The counter electrode was a large platinum gauze spot welded to platinum wire. Data were collected and analyzed on a Pentium 20 computer interfaced to a BioAnalytical Systems Model 100B/W Potentiostat. Cyclic voltammetry was performed at scan rates ranging from 50 to 200 mV/s. In cyclic voltammetry, electrochemical flux is determined from the measured peak current ( $i_p$ ) for reversible electron transfers, and the measured peak current is a function of the extraction coefficient ( $K$ ) and the apparent diffusion coefficient ( $D_{app}$ ) of the redox probe in the 25 composite or film.

$$\text{Flux} = i_p / (nFA) \quad (1)$$

$$i_p = (2.69 \times 10^5) n^{3/2} A D_{app}^{1/2} v^{1/2} \epsilon K C^* \quad (2)$$

WO 01/99127

PCT/US01/19368

where  $n$  is the number of electrons transferred,  $F$  is Faraday's constant,  $A$  is the area of the electrode,  $v$  is the scan rate,  $\epsilon$  is the porosity of the film, and  $C^*$  is the concentration of  $\text{Ru}(\text{bpy})_3^{+2}$  in solution. The porosity of Nafion® films and composites consisting of one bead is approximately 1.0, and the porosity of the magnetic composites is about 0.85. Three replicates of each experiment were performed.

Samarium Cobalt. Forming samarium cobalt/Nafion® composites has several engineering problems. Due to the high magnetic field environment of the samarium cobalt magnetic microparticles and the high density of the samarium particles, the samarium cobalt microparticles do not suspend in the Nafion® solution. This causes problems in determining the exact amount of magnetic micromaterial on the electrode surface. Therefore, flux enhancements cannot be quantified with the needed precision. A representative cyclic voltammogram of  $\text{Ru}(\text{bpy})_3^{+2}$  in a samarium cobalt/Nafion® composite and in a Nafion® film is provided in Figure 6. Exact flux enhancement values cannot be determined because they require knowledge of porosities, which are unknown because of the inadequate suspension. However, it is evident that these systems do provide much larger flux enhancements than their magnetite counterparts. The peak currents for the silane coated samarium cobalt composites are seven to eight times larger than the Nafion® films. The difference in the peak potentials ( $\Delta E_p$ ) are only 6 mV smaller than the  $\Delta E_p$ 's for the Nafion® films. However, the peak potentials are asymmetrically shifted by 30 mV. The forward peak potential is shifted +30 mV with respect to Nafion®, and the backward peak potential is shifted -36 mV with respect to Nafion®. Therefore,  $\text{Ru}(\text{bpy})_3^{+2}$  is harder to electrolyze in the samarium cobalt composite than it is in Nafion®.

One Samarium Cobalt Particle. The single particle composite experiments are of interest because they show that only small amounts of particle/Nafion® interfaces are necessary to create a significant impact on electrochemical flux.

Because magnetic fields increase self-exchange rates by several orders of magnitude, small volumes of magnetic particles can have measurable effects on electrochemical flux. The cyclic voltammetry of  $\text{Ru}(\text{bpy})_3^{+2}$  in a single samarium cobalt particle/Nafion® composite and a Nafion® film is shown in Figure 7. The roughly 1 mm diameter (the upper limit is roughly

WO 01/99127

PCT/US01/19368

2 mm in diameter) samarium cobalt particle/Nafion® composite shows lower flux enhancements for Ru(bpy)<sub>3</sub><sup>+2</sup> than a regular composite. This is expected because there is little bead/Nafion® interface, and because a lower volume percent of the film is in the presence of a high magnetic field. The differences in the peak potentials ( $\Delta E_p$ ) are approximately the same as the  $\Delta E_p$ 's for the Nafion® films. The peak potentials are asymmetrically shifted by only 15 mV because there is a smaller average magnetic field at the electrode surface. The forward peak potential is shifted +5 mV with respect to Nafion®, and the backward peak potential is shifted -5 mV with respect to Nafion®.

Magnetite. The siloxyl coated magnetite composites are similar in morphology to the Polyscience paramagnetic microparticle composite, except the Polyscience paramagnetic microparticle composites have an orange tint to them, whereas the siloxyl coated magnetite composites are dark black. Siloxyl coated magnetite microparticles comprise black microparticles, and Polyscience paramagnetic microparticles comprise dark orange/brown microparticles. The orange brown coloration is due in part to the thick polystyrene shroud around the Polyscience paramagnetic microparticle, and in part to degradation of magnetite to other forms of iron oxide.

The siloxyl coated magnetite/Nafion® composites show similar enhancements in electrochemical flux as probed by cyclic voltammetry. This can be seen from the cyclic voltammograms of Ru(bpy)<sub>3</sub><sup>+2</sup> in a siloxyl coated magnetite/Nafion® composite and in a Nafion® film, as is shown in Figure 8. The differences in the peak potentials ( $\Delta E_p$ ) are 5 mV larger than the  $\Delta E_p$ 's for the Nafion® films. The forward peak potential is shifted 48 mV with respect to Nafion®, and the backward peak potential is shifted -33 mV with respect to Nafion®.

Nickel. Siloxyl coated nickel microparticles form composites that look similar to the composites formed from siloxyl coated magnetite microparticles. The main functional difference between the two composites is that nickel is a weaker magnetic material. Nickel microparticles are superparamagnetic, so they only sustain a magnetic field in the presence of an external magnetic field. Therefore, the cyclic voltammogram of the siloxyl coated nickel microparticle/Nafion® composite shown in Figure 9 is in the presence of a 0.2 T external

WO 01/99127

PCT/US01/19368

cylindrical magnet. Because nickel microparticles are less magnetic than magnetite, the flux enhancements for siloxyl coated nickel microparticle/Nafion® composites are less than for siloxyl coated magnetite microparticles/Nafion® composites. The difference in the peak potentials ( $\Delta E_p$ ) are 30 mV larger than the  $\Delta E_p$ 's for the Nafion® films. The forward peak potential is shifted 58 mV with respect to Nafion® and the backward peak potential is shifted -28 mV with respect to Nafion®.

Summary Data. The results for the cyclic voltammetry are summarized in Table 2. All of the data in Table 2 are adjusted for porosity, except the siloxyl coated samarium cobalt milliparticle and particle data. The clumping of samarium cobalt microparticles because of magnetic attraction, which forms milliparticles, does not allow determination of film porosity. The porosities of the samarium cobalt milliparticle composites are approximately 1.0 because a particle consumes only a small volume of the polymer composite. The siloxyl coated magnetic micromaterials appear to be as stable as the Polysciences microspheres. The silane coated magnetite microparticles, prepared as described herein, show the same flux enhancement as observed for the Polysciences microspheres, within errors of measurement. However, the flux enhancements for siloxyl coated magnetite are more reproducible than the flux enhancements for Polysciences microparticles.

Table 2. Flux Enhancements and Peak Shifts for Siloxyl Coated Microparticle/Nafion Composites

	Magnetic Material	Flux Enhancement	Scan Rate mV/s	$\Delta \Delta E_p$ mV	$\Delta E_a$ mV	$\Delta E_c$ mV
	Polysciences Microspheres	$3.4 \pm 0.7$	50	+15	+35	+20
	Sm <sub>2</sub> Co <sub>7</sub> Microparticles	$\approx 7.6$	100	-6	+30	-36
	Sm <sub>2</sub> Co <sub>7</sub> Milliparticle	$1.32 \pm 0.10$	100	$\sim 0$	+15	-15
	Magnetite Microparticles	$3.0 \pm 0.4$	100	+15	+48	-33
	Nickel Microparticles	$1.65 \pm 0.3$	100	+30	+35	-28

The silane coated nickel composites produce much smaller flux enhancements than the magnetite composites because nickel is a much weaker magnetic material. The nickel

WO 01/99127

PCT/US01/19368

microparticles would not be commercially useful in many technological applications because the flux enhancements are so small, and they require the presence of an external magnetic field. However, they might constitute acceptable material for a flux throttle or switch, as can iron and cobalt microparticles.

5       The silane coated samarium cobalt composites have excellent magnetic benefits even if they have engineering difficulties. The large flux enhancement seen in Figure 5 illustrates the usefulness of this magnetic material. The best illustration of the power of the siloxyl coated samarium cobalt composites is the single particle experiment, results of which are shown in Figure 6.

10      The flux enhancements shown in Table 2 increase with magnetic field strength. This is expected because the apparent diffusion coefficient increases linearly with magnetic field in the interface. The peak shifts vary from composite to composite because of the interplay between the magnetic field effects on apparent diffusion coefficients and on heterogeneous electron transfer. Large magnetic fields dramatically increase apparent diffusion coefficients, 15 which generally yield larger  $\Delta E_p$  values. Large magnetic field effects on heterogeneous electron transfer reactions increase heterogeneous electron transfer rates for paramagnetic species reacting to diamagnetic species, but there is no increase in rate for diamagnetic species reacting to paramagnetic species. The interplay between these two magnetic field effects cause the large variations in peak shifts seen in Table 2.

20      The foregoing embodiments and advantages are merely exemplary and are not to be construed as limiting the present invention. The present teaching can be readily applied to other types of apparatuses, coating methodologies, and siloxyl coated particle uses. The description of the present invention is intended to be illustrative, and not to limit the scope of the claims. Many alternatives, modifications, and variations will be apparent to those skilled 25 in the art. In the claims, means-plus-function clauses are intended to cover the structures described herein as performing the recited function, and not only structural equivalents but also equivalent structures. For example, additional uses of siloxyl coated magnetic microparticles and siloxyl coated magnetic milliparticles on kinds of electrodes not specifically described herein fall within the intended scope of the present invention. Also, siloxyl coating

WO 01/99127

PCT/US01/19368

of metallic particles not specifically disclosed herein fall within the intended scope of the present invention. In addition, uses of siloxyl coated magnetic microparticles not specifically described herein fall within the intended scope of the present invention when they enhance or decrease a magnetically susceptible process of any sort. Further more, magnetic and metallic materials not specifically listed herein are intended to be encompassed by the scope of the present invention.

WO 01/99127

PCT/US01/19368

**WHAT IS CLAIMED IS:**

1. Siloxyl coated metallic particles, comprising:  
metallic particles with at least one covalently bound siloxyl coating.
2. The siloxyl coated metallic particles according to claim 1, wherein the at least one covalently bound siloxyl coating is cross linked.
3. Siloxyl coated metallic particles, comprising:  
metallic particles with at least one cross linked and covalently bound siloxyl coating.
4. A method of making siloxyl coated and cross linked metallic particles, comprising the steps of:  
mixing siloxyl coated metallic particles with a cross linking solution to yield a siloxyl coated metallic particle-cross linking solution mixture;  
5 creating a suspension of said siloxyl coated metallic particle-cross linking solution mixture for a period of time to yield siloxyl coated and cross linked metallic particles; and  
separating said siloxyl coated and cross linked metallic particles from said cross linking solution.
5. The method of making silane coated and cross linked metallic particles according to claim 4, further comprising the step of:  
rinsing said silane coated and cross linked metallic particles to yield purified silane coated and cross linked metallic particles.
6. The method of making silane coated and cross linked metallic particles according to claim 4, wherein

WO 01/99127

PCT/US01/19368

the coating procedure is conducted at about room temperature, and said period of time is about 4 hours.

7. The method of making silane coated and cross linked metallic particles according to claim 4, wherein said metallic particles comprise metallic microparticles.

8. The method of making silane coated and cross linked metallic particles according to claim 7, wherein said metallic microparticles comprise a range of diameters from about 2  $\mu\text{m}$  to about 10  $\mu\text{m}$ .

9. The method of making silane coated and cross linked metallic particles according to claim 7, wherein said metallic microparticles comprise a range of diameters from about 0.1  $\mu\text{m}$  to about 20  $\mu\text{m}$ .

10. The method of making silane coated and cross linked metallic particles according to claim 7, wherein said metallic microparticles comprise magnetic microparticles.

11. The method of making silane coated and cross linked metallic particles according to claim 10, wherein said magnetic microparticles comprise at least one of an iron oxide, a samarium cobalt, nickel, and neodymium iron boron.

12. The method of making silane coated and cross linked metallic particles according to claim 4, wherein said cross linking solution comprises at least one of ethylene glycol diglycidyl ether, ethylene glycol dimethacrylate, 2-ethylhexyl glycidyl ether, ethylene glycol bis [pentakis (glycidyl allyl ether)] ether, 1,4-butanediol glycidyl ether, 4-tert-butyl phenyl glycidyl ether, N,N'-bis (acryloyl) cystamine, nitrilotriacetic acid tri (N-succinimidyl) ester, and 4-azidophenyl isothiocyanate.

5

WO 01/99127

PCT/US01/19368

13. The method of making silane coated and cross linked metallic particles according to claim 4, wherein said cross linking solution comprises about 50/50 (vol/vol) of a cross linking agent and a solvent in which said cross linking agent is soluble.

14. The method of making silane coated and cross linked metallic particles according to claim 13, wherein said cross linking agent comprises at least one of ethylene glycol diglycidyl ether, ethylene glycol dimethacrylate, 2-ethylhexyl glycidyl ether, ethylene glycol bis [pentakis (glycidyl allyl ether)] ether, 1,4-butanediol glycidyl ether, 4-tert-butyl phenyl glycidyl ether, 5 N,N'-bis (acryloyl) cystamine, nitrilotriacetic acid tri (N-succinimidyl) ester, and 4-azidophenyl isothiocyanate.

16. The method of making silane coated and cross linked metallic particles according to claim 14, wherein said solvent comprises water.

17. A method of making siloxyl coated metallic particles, comprising the steps of: mixing metallic particles with a silane solution to yield a metallic particle-silane solution mixture;

5 creating a suspension of said metallic particle-silane solution mixture for a first period of time to yield siloxyl coated metallic particles; and separating said siloxyl coated metallic particles from said silane solution.

18. A method of making siloxyl coated metallic particles, further comprising the step of:

tinsing said siloxyl coated metallic particles with an organic solvent to yield purified siloxyl coated metallic particles.

19. The method of making siloxyl coated metallic particles according to claim 17, further comprising the step of drying said purified siloxyl coated metallic particles.

WO 01/99127

PCT/US01/19368

20. A method of making siloxyl coated and cross linked metallic particles, comprising the steps of:

mixing dried and purified siloxyl coated metallic particles, made by the method of claim 18, with a cross linking solution to yield a siloxyl coated metallic particle-cross linking solution mixture;

creating a suspension of said siloxyl coated metallic particle-cross linking solution mixture for a second period of time to yield siloxyl coated and cross linked metallic particles; and

separating said siloxyl coated and cross linked metallic particles from said cross linking solution.

21. The method of making siloxyl coated and cross linked metallic particles according to method of claim 20, further comprising the step of:

rinsing said siloxyl coated and cross linked metallic particles to yield purified siloxyl coated and cross linked metallic particles.

22. The method of making siloxyl coated and cross linked metallic particles according to claim 20, wherein

the coating procedure is conducted at about room temperature, and  
said first and second periods of time each independently equal about 4 hours.

23. The method of making siloxyl coated metallic particles according to claim 17, wherein said silane solution comprises at least one  $X-C_x$ -trialkoxysilane, wherein

$X$  comprises a group reactive toward a cross linking agent, comprising one of an amino, an amide, a thiol, an aldehyde, a nitrile, a sulfonyl, an alcohol, a carbonyl, a carboxy, a chloro, an alkoxy, a bromo, an iodo, a sulfonyl, a carbonyl, and a methacryl;

$x$  equals 1 to about 20;

WO 01/99127

PCT/US01/19368

$C_x$  is a linear or branched carbon chain that is saturated or unsaturated, and that also can comprise a cyclic group with the proviso that said cyclic group must be separated from the trialkoxysilane moiety by a carbon chain that is at least 2 carbons in length; and

10 trialkoxysilane comprises three alkoxy groups covalently attached to a silane group, and wherein the three alkoxy groups independently can be methoxy, ethoxy, propoxy, butoxy, pentoxy, hexoxy, heptoxy, or phenoxy, wherein the phenoxy may be substituted.

24. The method of making siloxyl coated metallic particles according to claim 23, wherein the at least one  $X-C_x$ -trialkoxysilane comprises 3-aminopropyltrimethoxysilane.

25. The method of making siloxyl coated metallic particles according to claim 17, wherein said silane solution comprises at least one organic solvent.

26. The method of making siloxyl coated metallic particles according to claim 25, wherein said organic solvent comprises toluene.

27. The method of making siloxyl coated metallic particles according to claim 17, wherein said metallic particles comprise metallic microparticles.

28. The method of making siloxyl coated metallic particles according to claim 27, wherein said metallic microparticles comprise a range of diameters from about 2  $\mu\text{m}$  to about 10  $\mu\text{m}$ .

29. The method of making siloxyl coated metallic particles according to claim 27, wherein said metallic microparticles comprise a range of diameters from about 0.1  $\mu\text{m}$  to about 20  $\mu\text{m}$ .

WO 01/99127

PCT/US01/19368

30. The method of making siloxyl coated metallic particles according to claim 17, wherein said metallic particles comprise milliparticles comprising a range of diameters from about 20  $\mu\text{m}$  to about 2 mm.

31. The method of making siloxyl coated metallic particles according to claim 27, wherein said metallic microparticles comprise magnetic microparticles.

32. The method of making siloxyl coated metallic particles according to claim 31, wherein said magnetic microparticles comprise at least one of an iron oxide, a samarium cobalt, nickel, and a neodymium iron boron.

33. The method of making siloxyl coated and cross linked metallic particles according to claim 20, wherein said cross linking solution comprises at least one of ethylene glycol diglycidyl ether, ethylene glycol dimethacrylate, 2-ethylhexyl glycidyl ether, ethylene glycol bis [pentakis (glycidyl allyl ether)] ether, 1,4-butanediol glycidyl ether, 4-tert-butyl phenyl glycidyl ether, N,N'-bis (acryloyl) cystamine, nitrilotriacetic acid tri (N-succinimidyl) ester, and 4-azidophenyl isothiocyanate.

34. The method of making siloxyl coated and cross linked metallic particles according to claim 20, wherein said cross linking solution comprises about 50/50 (vol/vol) of a cross linking agent and a solvent in which said cross linking agent is soluble.

35. The method of making siloxyl coated and cross linked metallic particles according to claim 34, wherein said cross linking agent comprises at least one of ethylene glycol diglycidyl ether, ethylene glycol dimethacrylate, 2-ethylhexyl glycidyl ether, ethylene glycol bis [pentakis (glycidyl allyl ether)] ether, 1,4-butanediol glycidyl ether, 4-tert-butyl phenyl glycidyl ether, N,N'-bis (acryloyl) cystamine, nitrilotriacetic acid tri (N-succinimidyl) ester, and 4-azidophenyl isothiocyanate.

WO 01/99127

PCT/US01/19368

36. The method of making siloxyl coated and cross linked metallic particles according to claim 34, wherein said solvent comprises water.

37. A method of providing a plurality of siloxyl coatings on metallic particles, comprising the steps of:

annealing metallic particles, having a single siloxyl coating, in a nitrogen environment at a temperature less than the Curie temperature; and

5 repeating the steps of claim 16 at least one time to yield metallic particles having at least two siloxyl coatings.

38. The method of providing a plurality of siloxyl coatings on metallic particles according to claim 37, wherein annealing is effected by heating to about 450°C ( $\pm$  about 30°C) for about an hour.

39. A method of siloxyl coating metallic particles, comprising the steps of:

mixing metallic particles with a silane solution to yield a metallic particle-silane solution mixture;

5 creating a suspension of said metallic particle-silane solution mixture for a first period of time to yield siloxyl coated metallic particles;

separating said siloxyl coated metallic particles from said silane solution;

rinsing said siloxyl coated metallic particles with an organic solvent to yield purified siloxyl coated metallic particles;

drying said purified siloxyl coated metallic particles;

10 mixing said dried and purified siloxyl coated metallic particles with a cross linking solution to yield a siloxyl coated metallic particle-cross linking solution mixture;

creating a suspension of said siloxyl coated particle-cross linking solution mixture for a second period of time to yield siloxyl coated and cross linked metallic particles; and

WO 01/99127

PCT/US01/19368

15 separating said siloxyl coated and cross linked metallic particles from said cross linking solution.

40. The method of siloxyl coating metallic particles according to claim 39, further comprising the step of:

rinsing said siloxyl coated and cross linked metallic particles to yield purified siloxyl coated and cross linked metallic particles.

41. The method of siloxyl coating metallic particles according to claim 40, further comprising the step of:

drying said purified siloxyl coated and cross linked metallic particles.

42. The method of siloxyl coating metallic particles according to claim 39, wherein the coating procedure is conducted at about room temperature, and said first and second periods of time each independently equal about 4 hours.

43. The method of siloxyl coating metallic particles according to claim 39, wherein said silane solution comprises at least one  $X\text{-C}_x\text{-trialkoxysilane}$ , wherein

5  $X$  comprises a group reactive toward a cross linking agent, comprising one of amino, amide, thiol, aldehyde, nitrile, sulfonyl, alcohol, carbonyl, carboxy, chloro, an alkoxy, a bromo, an iodo, a sulfonyl, a carbonyl, and a methacryl;

$x$  equals 1 to about 20;

$C_x$  is a linear or branched carbon chain that is saturated or unsaturated, and that also can comprise a cyclic group with the proviso that said cyclic group must be separated from the trialkoxysilane moiety by a carbon chain that is at least 2 carbons in length; and

10 trialkoxysilane comprises three alkoxy groups covalently attached to a silane group, and wherein the three alkoxy groups independently can be methoxy, ethoxy, propoxy, butoxy, pentoxy, hexoxy, heptoxy, or phenoxy, wherein the phenoxy may be substituted.

WO 01/99127

PCT/US01/19368

44. The method of siloxyl coating metallic particles according to claim 43, wherein the at least one X-C<sub>x</sub>-trialkoxysilane comprises 3-aminopropyltrimethoxysilane.

45. The method of siloxyl coating metallic particles according to claim 39, wherein said organic solvent comprises at least one aromatic organic solvent.

46. The method of siloxyl coating metallic particles according to claim 45, wherein said aromatic organic solvent comprises toluene.

47. The method of siloxyl coating metallic particles according to claim 39, wherein said metallic particles comprise metallic microparticles.

48. The method of siloxyl coating metallic particles according to claim 47, wherein said metallic microparticles comprise a range of diameters from about 2 μm to about 10 μm.

49. The method of siloxyl coating metallic particles according to claim 47, wherein said metallic microparticles comprise a range of diameters from about 0.1 μm to about 20 μm.

50. The method of siloxyl coating metallic particles according to claim 39, wherein said metallic particles comprise milliparticles comprising a range of diameters from about 20 μm to about 2 mm.

51. The method of siloxyl coating metallic particles according to claim 47, wherein said metallic microparticles comprise magnetic microparticles.

52. The method of siloxyl coating metallic particles according to claim 51, wherein said magnetic microparticles comprise at least one of an iron oxide, a samarium cobalt, nickel, and a neodymium iron boron.

WO 01/99127

PCT/US01/19368

53. The method of siloxyl coating metallic particles according to claim 39, wherein said cross linking solution comprises at least one of ethylene glycol diglycidyl ether, ethylene glycol dimethacrylate, 2-ethylhexyl glycidyl ether, ethylene glycol bis [pentakis (glycidyl allyl ether)] ether, 1,4-butanediol glycidyl ether, 4-tert-butyl phenyl glycidyl ether, N,N'-bis (acryloyl) cystamine, nitrilotriacetic acid tri (N-succinimidyl) ester, and 4-azidophenyl isothiocyanate.

54. The method of siloxyl coating metallic particles according to claim 39, wherein said cross linking solution comprises about 50/50 (vol/vol) of a cross linking agent and a solvent in which said cross linking agent is soluble.

55. The method of siloxyl coating metallic particles according to claim 54, wherein said cross linking agent comprises at least one of ethylene glycol diglycidyl ether, ethylene glycol dimethacrylate, 2-ethylhexyl glycidyl ether, ethylene glycol bis [pentakis (glycidyl allyl ether)] ether, 1,4-butanediol glycidyl ether, 4-tert-butyl phenyl glycidyl ether, N,N'-bis (acryloyl) cystamine, nitrilotriacetic acid tri (N-succinimidyl) ester, and 4-azidophenyl isothiocyanate.

56. The method of siloxyl coating metallic particles according to claim 54, wherein said solvent comprises water.

57. A method of providing a plurality of siloxyl coatings on metallic particles, comprising the steps of:

annealing metallic particles, having a single siloxyl coating, in a nitrogen environment at a temperature less than the Curie temperature; and

5 repeating the steps of claim 39 at least one time to yield metallic particles having at least two siloxyl coatings.

58. The method of siloxyl coating metallic particles of claim 57, wherein annealing is effected by heating to about 450°C ( $\pm$  about 30°C) for about an hour.

WO 01/99127

PCT/US01/19368

59. A method of making magnetically modified electrodes comprising siloxyl coated magnetic particles, comprising the steps of:

providing an electrode, comprising at least one surface;  
polishing the at least one surface of the electrode;  
cleaning the at least one surface of the electrode; and  
applying to the at least one surface a coating comprising siloxyl coated magnetic particles.

60. The method of making magnetically modified electrodes comprising siloxyl coated magnetic particles according to claim 59, further comprising the step of:

drying the electrode with at least one coated surface.

61. The method of making magnetically modified electrodes comprising siloxyl coated magnetic particles according to claim 59, wherein the siloxyl coating of the siloxyl coated magnetic particles is cross linked.

62. A method of making magnetically modified electrodes comprising siloxyl coated magnetic particles, comprising the steps of:

providing an electrode, comprising at least one surface;  
polishing the at least one surface of the electrode;  
cleaning the at least one surface of the electrode; and  
applying to the at least one surface at least one coating comprising magnetic particles that are coated with at least one siloxyl coating.

63. The method of making magnetically modified electrodes comprising siloxyl coated magnetic particles according to claim 62, further comprising the step of:

drying the electrode with at least one coated surface.

WO 01/99127

PCT/US01/19368

64. The method of making magnetically modified electrodes comprising siloxyl coated magnetic particles according to claim 62, wherein at least one coating of the at least one siloxyl particle coating is cross linked.

65. The method of making magnetically modified electrodes comprising siloxyl coated magnetic particles according to claim 62, wherein at least one of the at least one surface coating comprises magnetic particles comprising at least one cross linked siloxyl particle coating.

66. A magnetically modified electrode with siloxyl coated magnetic particles, comprising:

an electrode, with a surface having at least one coating that includes siloxyl coated magnetic particles.

67. The magnetically modified electrode with siloxyl coated magnetic particles according to claim 66, wherein some of the siloxyl coated magnetic particles are cross linked.

68. A magnetically modified fuel cell with altered function, comprising:  
at least one electrode, each respective electrode comprising at least one surface with at least one coating thereon, wherein at least one of the at least one surface coatings comprises siloxyl coated magnetic particles.

69. The magnetically modified fuel cell with altered function according to claim 68, wherein at least one siloxyl particle coating of the siloxyl coated magnetic particles is cross linked.

70. A magnetically modified fuel cell with altered oxidation rates of organic fuels, comprising:

WO 01/99127

PCT/US01/19368

5 at least one electrode, each respective electrode comprising at least one surface with at least one coating thereon, wherein at least one of the at least one surface coatings comprises siloxyl coated magnetic particles.

71. The magnetically modified fuel cell with altered oxidation rates of organic fuels according to claim 70, wherein at least one siloxyl particle coating of the siloxyl coated magnetic particles is cross linked.

72. A magnetically modified electrolytic cell with altered function, comprising:  
at least one electrode, each respective electrode comprising at least one surface with at least one coating thereon, wherein at least one of the at least one surface coatings comprises siloxyl coated magnetic particles.

73. The magnetically modified electrolytic cell with altered function according to claim 72, wherein at least one siloxyl particle coating of the siloxyl coated magnetic particles is cross linked.

74. A magnetically modified battery with altered function, comprising:  
at least one electrode, each respective electrode comprising at least one surface with at least one coating thereon, wherein at least one of the at least one surface coatings comprises siloxyl coated magnetic particles.

75. The magnetically modified battery with altered function according to claim 74, wherein at least one siloxyl particle coating of the siloxyl coated magnetic particles is cross linked.

WO 01/99127

PCT/US01/19368

76. A magnetically modified flux switch with altered function, comprising:  
at least one electrode, each respective electrode comprising at least one surface  
with at least one coating thereon, wherein at least one of the at least one surface coatings  
comprises siloxyl coated magnetic particles.

77. The magnetically modified flux switch with altered function according to claim  
76, wherein at least one siloxyl particle coating of the siloxyl coated magnetic particles is cross  
linked.

78. A paramagnetically modified flux switch with altered function, comprising:  
at least one electrode, each respective electrode comprising at least one surface  
with at least one coating thereon, wherein at least one of the at least one surface coatings  
comprises siloxyl coated magnetic particles.

79. The paramagnetically modified flux switch with altered function according to  
claim 78, wherein at least one siloxyl particle coating of the siloxyl coated magnetic particles  
is cross linked.

80. A magnetically modified semiconductor electrode with siloxyl coated magnetic  
particles, comprising:  
at least one surface comprising a semiconductor material, wherein the at least  
one surface comprises at least one coating that comprises siloxyl coated magnetic particles.

81. The magnetically modified semiconductor electrode with siloxyl coated  
magnetic particles according to claim 80, wherein at least one siloxyl particle coating of the  
siloxyl coated magnetic particles is cross linked.

WO 01/99127

PCT/US01/19368

82. The magnetically modified semiconductor electrode with siloxyl coated magnetic particles according to claim 81, wherein the semiconductor electrode comprises a component of a photoelectrochemical cell.

83. The magnetically modified semiconductor electrode with siloxyl coated magnetic particles according to claim 81, wherein the semiconductor electrode comprises a component of a solar cell.

84. A method of altering electrolysis of a fuel cell by applying siloxyl coated magnetic particles to at least one surface of at least one electrode thereof, comprising the steps of:

polishing the at least one surface of the at least one electrode;  
5  
cleaning the at least one surface of the at least one electrode; and  
applying to the at least one surface a coating comprising siloxyl coated magnetic particles.

85. The method of altering electrolysis of a fuel cell by applying siloxyl coated magnetic particles to at least one surface of at least one electrode thereof according to claim 84, further comprising the step of:

drying the electrode with at least one coated surface.

86. The method of altering electrolysis of a fuel cell according to claim 84, wherein altering electrolysis comprises one of enhancing electrolysis and diminishing electrolysis.

87. A method of altering electrolysis of an electrolytic cell by applying siloxyl coated magnetic particles to at least one surface of at least one electrode thereof, comprising the steps of:

5  
polishing the at least one surface of the at least one electrode;  
cleaning the at least one surface of the at least one electrode; and

WO 01/99127

PCT/US01/19368

applying to the at least one surface a coating comprising siloxyl coated magnetic particles.

88. The method of altering electrolysis of an electrolytic cell by applying siloxyl coated magnetic particles to at least one surface of at least one electrode thereof according to claim 87, further comprising the step of:

drying the electrode with at least one coated surface.

89. The method of altering electrolysis of an electrolytic cell according to claim 84, wherein altering electrolysis comprises one of enhancing electrolysis and diminishing electrolysis.

90. A method of altering electrolysis at an electrode surface by applying siloxyl coated magnetic particles to the electrode surface, comprising the steps of:

polishing the electrode surface;  
cleaning the electrode surface; and

5  
applying to the electrode surface a coating comprising siloxyl coated magnetic particles.

91. The method of altering electrolysis at an electrode surface by applying siloxyl coated magnetic particles to the electrode surface according to claim 90, further comprising the step of:

drying the electrode surface.

92. The method of altering electrolysis at an electrode surface according to claim 90, wherein altering electrolysis comprises one of enhancing electrolysis and diminishing electrolysis.

WO 01/99127

PCT/US01/19368

1 / 9

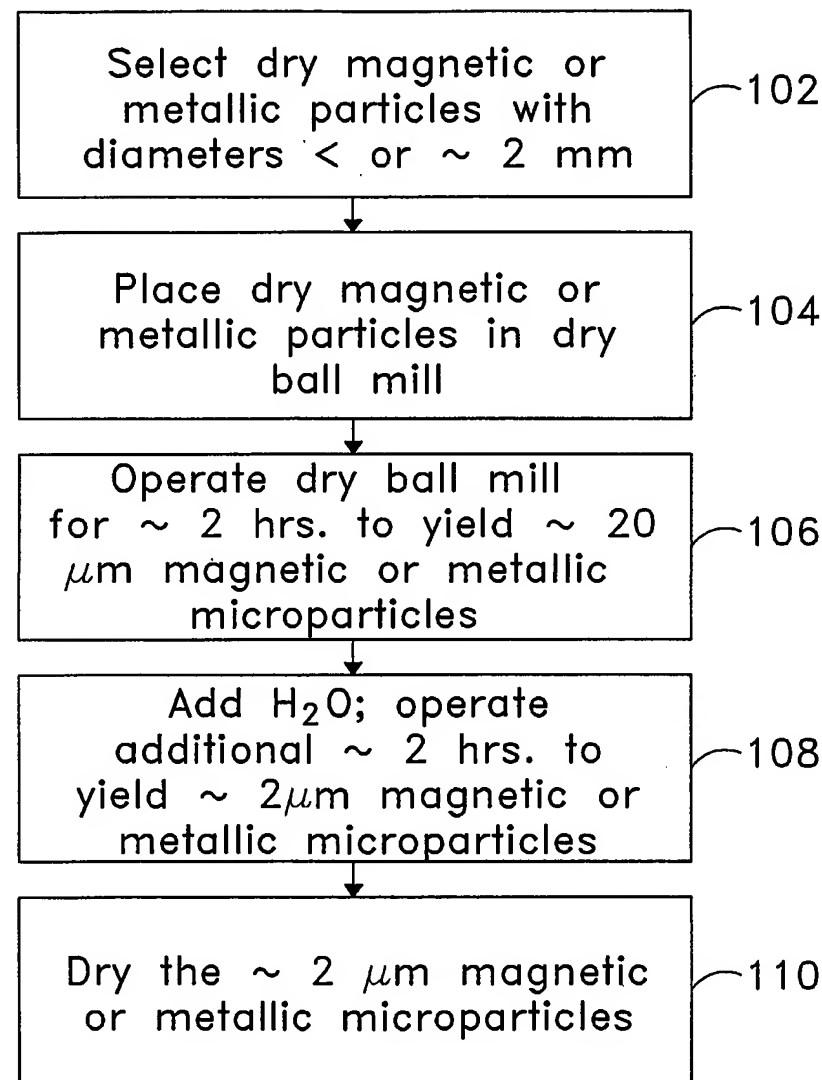


FIG. 1

WO 01/99127

PCT/US01/19368

2/9

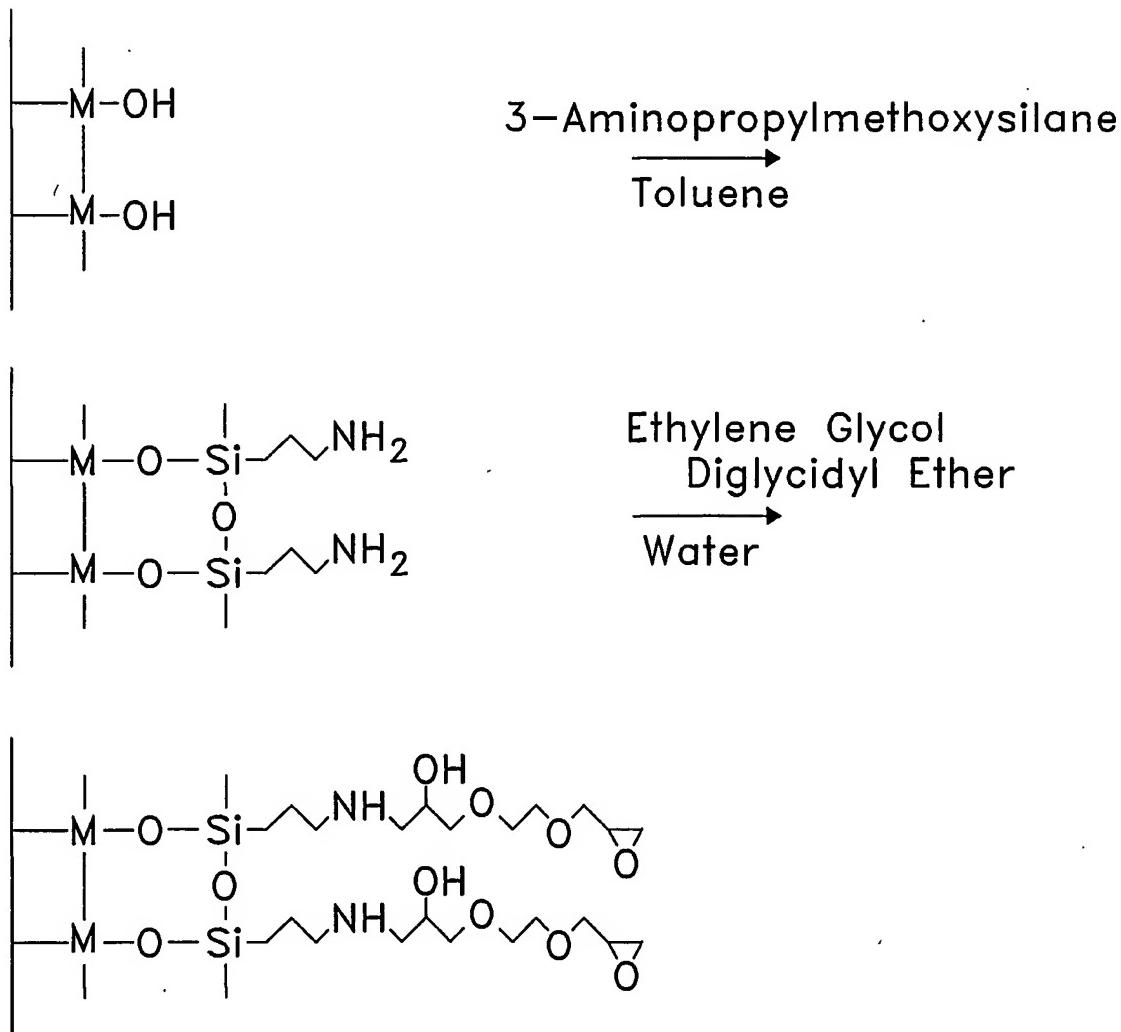


FIG. 2

WO 01/99127

PCT/US01/19368

3/9

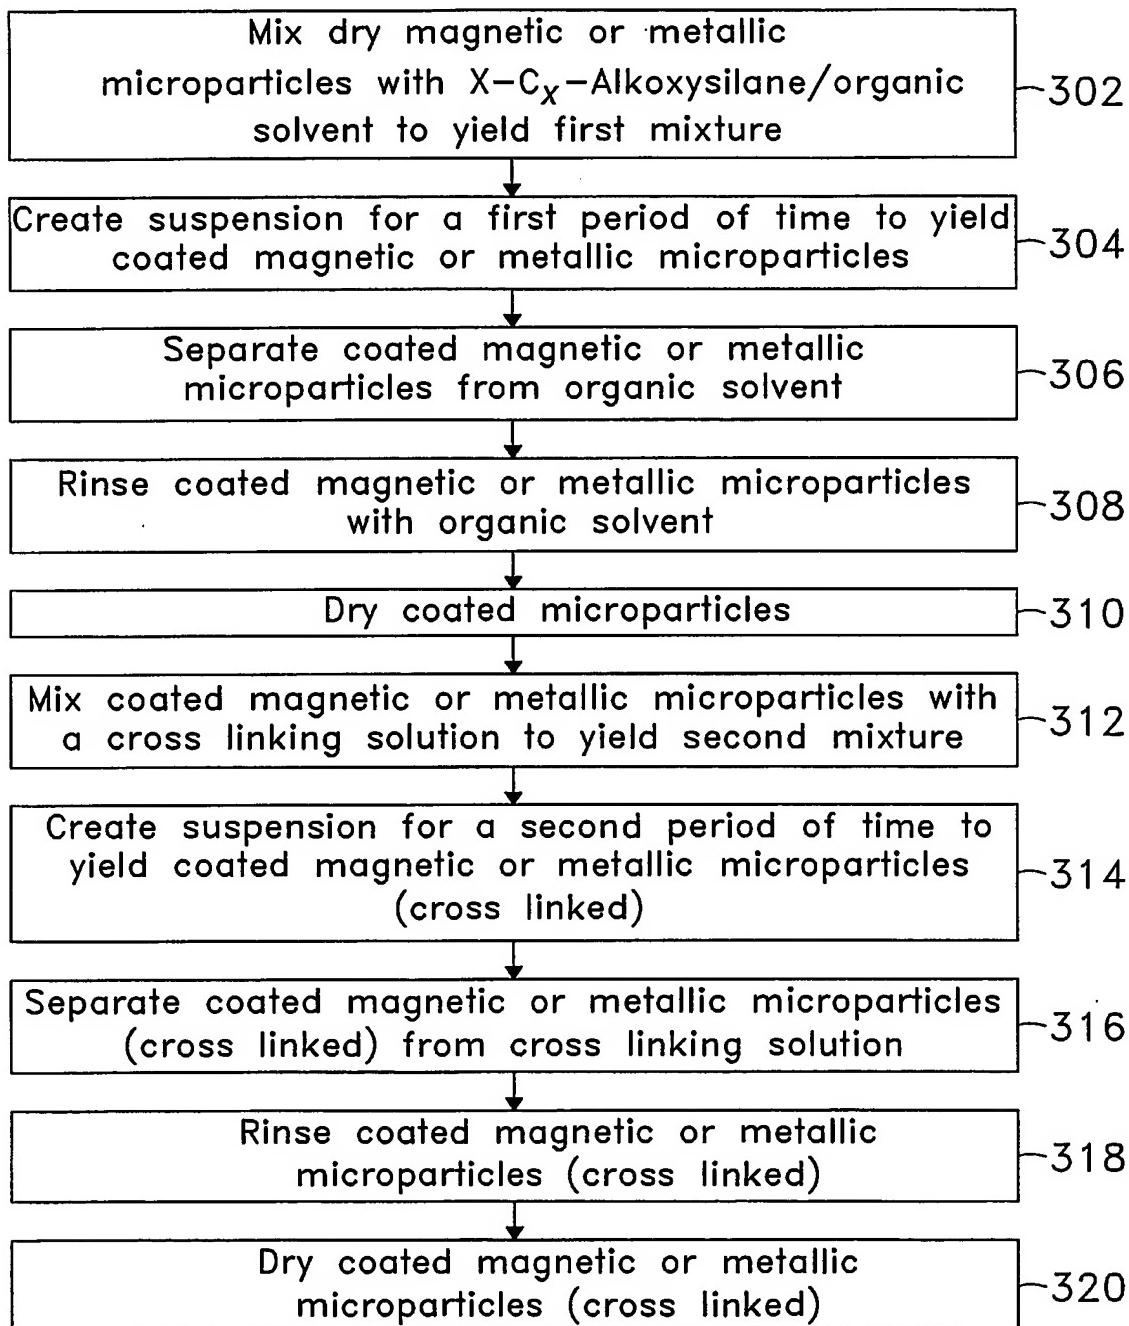


FIG. 3

WO 01/99127

PCT/US01/19368

4/9

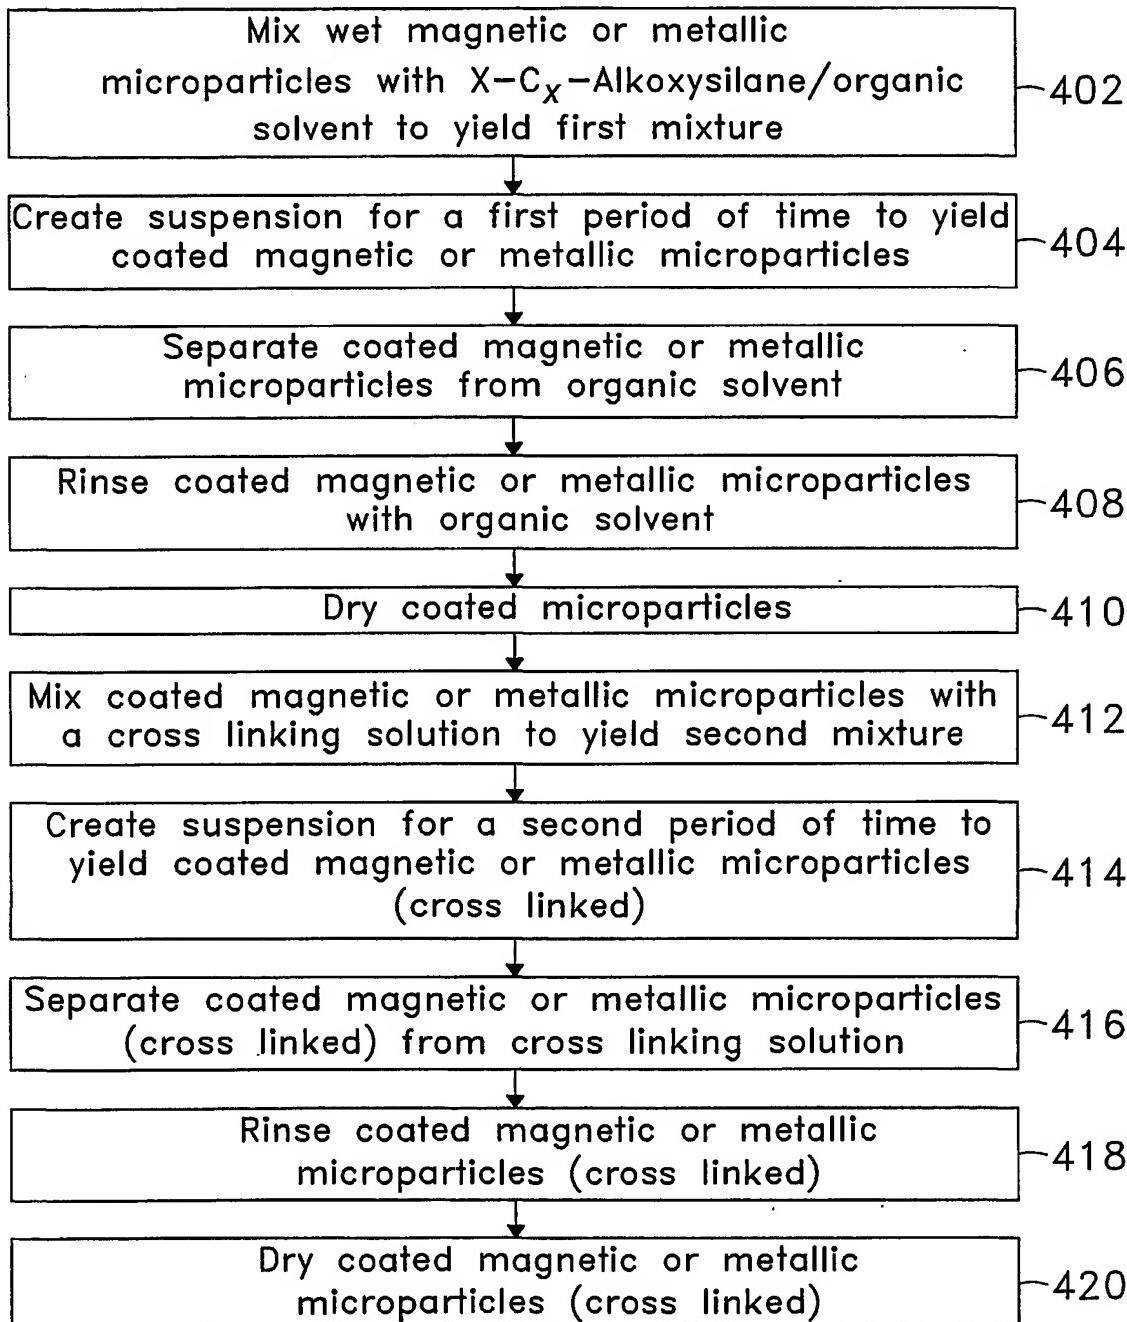


FIG. 4

WO 01/99127

PCT/US01/19368

5/9

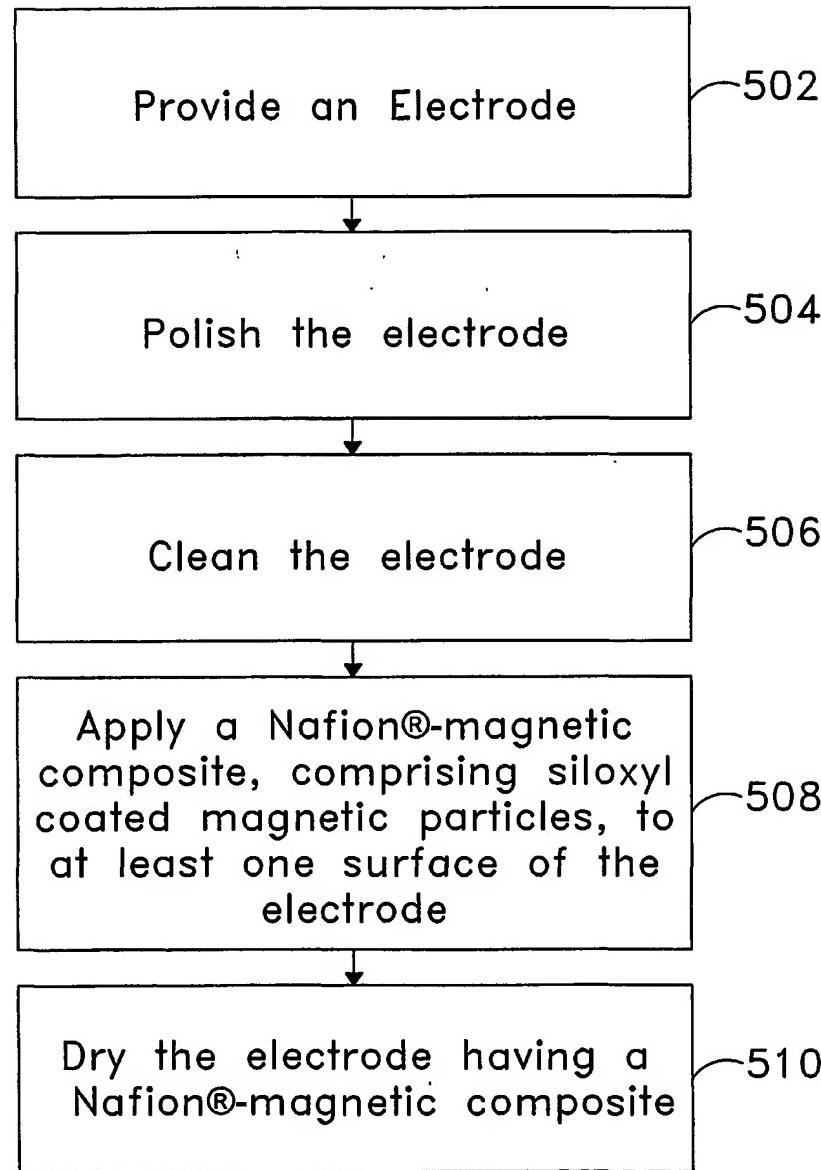


FIG. 5

WO 01/99127

PCT/US01/19368

6/9

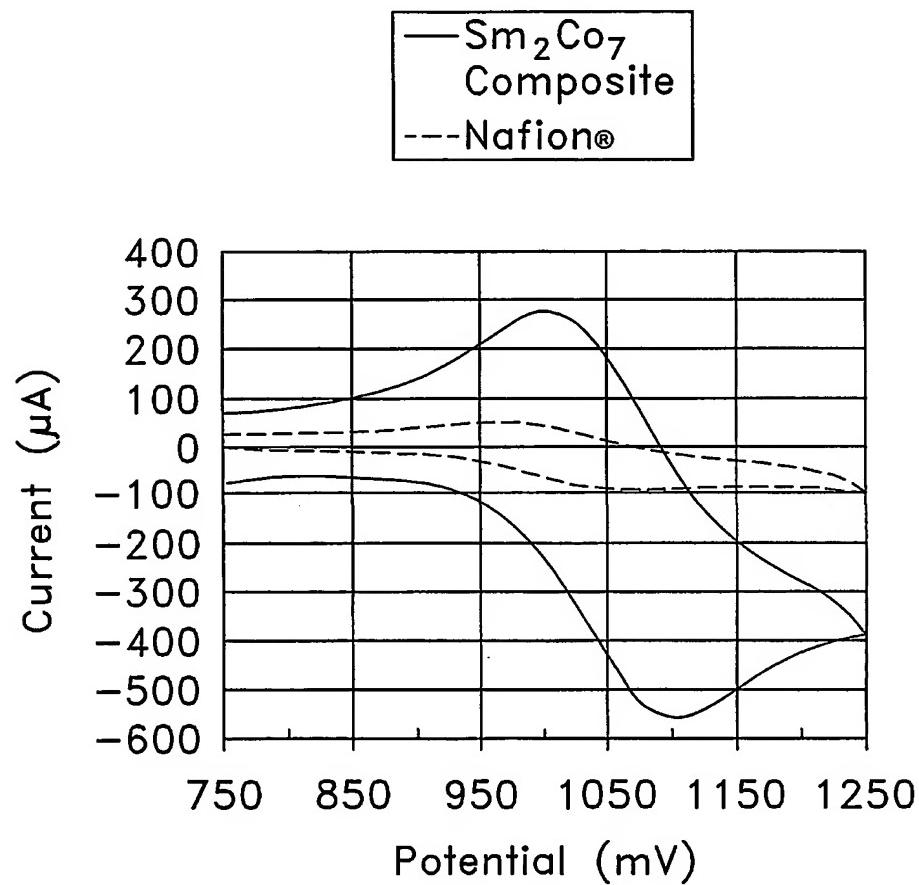


FIG. 6

WO 01/99127

PCT/US01/19368

7/9

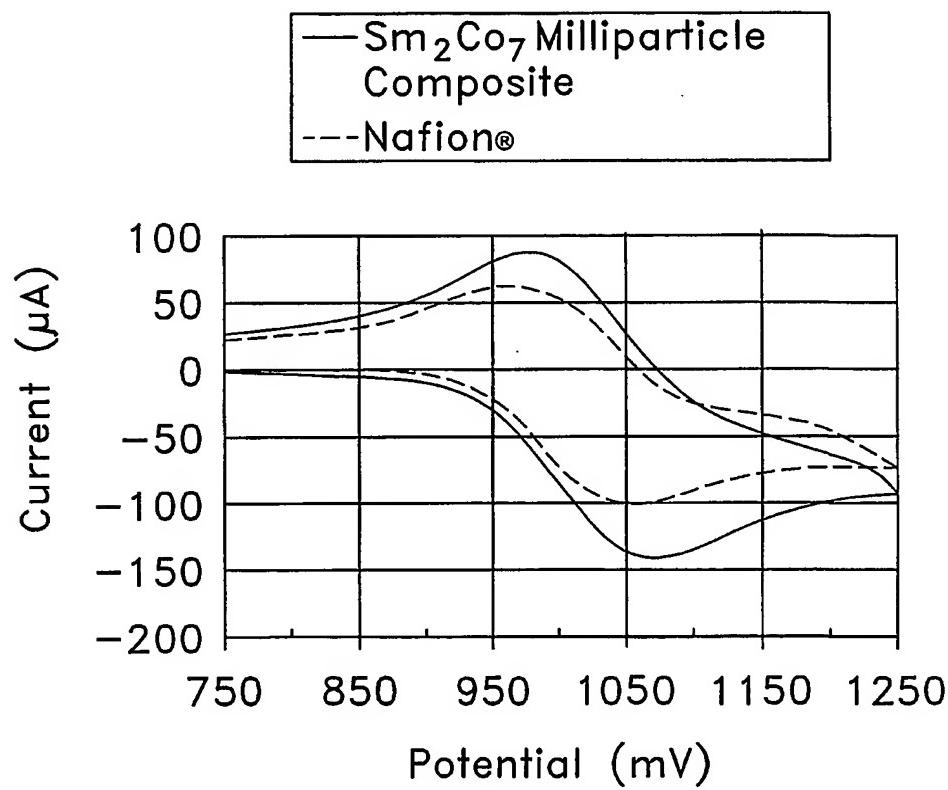


FIG. 7

WO 01/99127

PCT/US01/19368

8/9

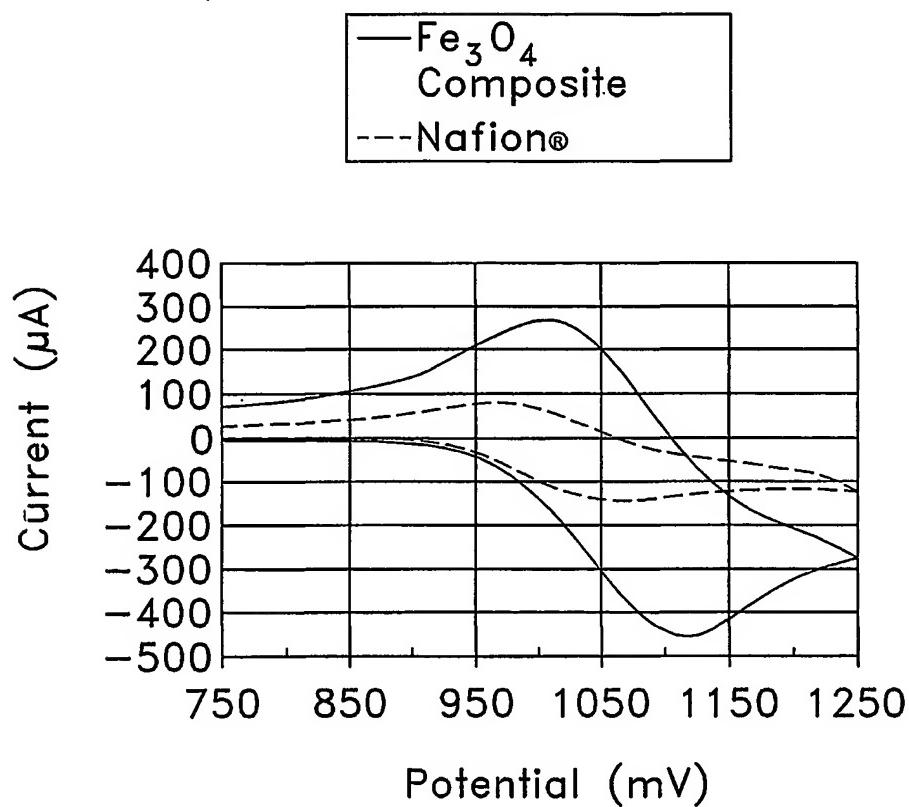


FIG. 8

WO 01/99127

PCT/US01/19368

9/9

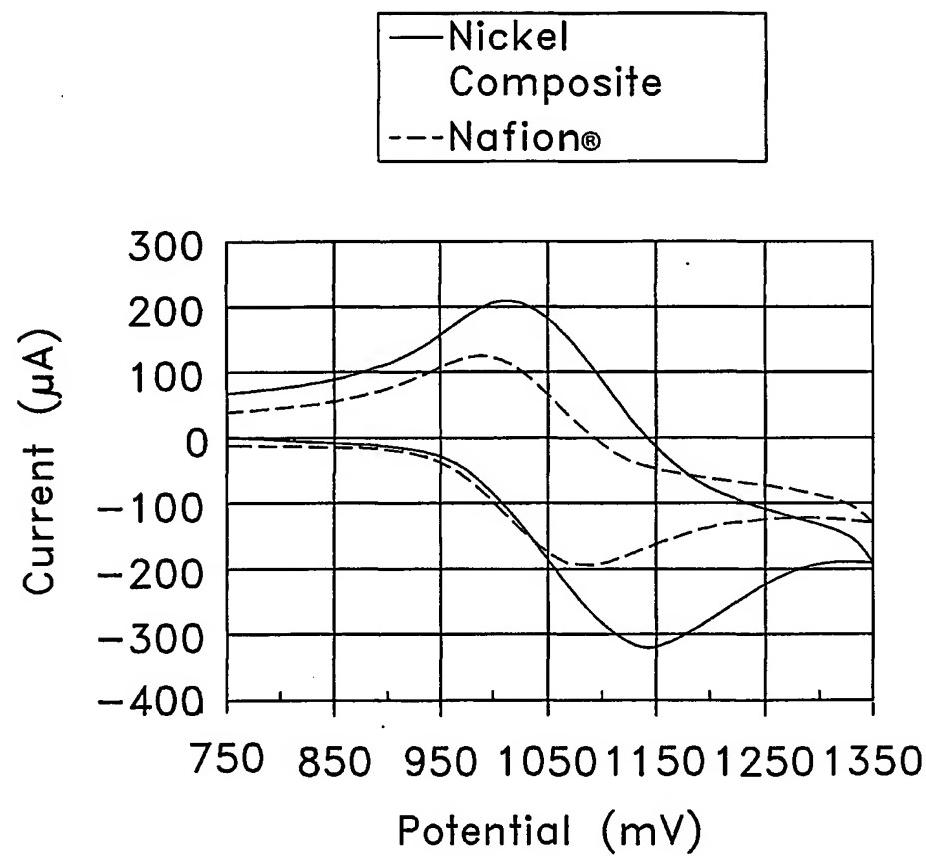


FIG. 9